

SENSORPAK

- Supports the development of measuring facilities and measuring stations.
- Simultaneous display of measurement values from up to 60 sensors in real time.
- Calculation using measurement values from up to 30 sensors in real time.
- Permits a multitude of different graphical presentations of using measurement, e.g. number representation, pointer representation, scale representation.
- Data registration in control cards or data tables.
- Further data processing is possible through external software, e.g. Microsoft-EXCEL, MeasurLink.

Optional accessories

No.	Description
12AAA807D	Cable RS-232C D-SUB 9/D-SUB 9 (2m)



Measurement screen



Meter screen

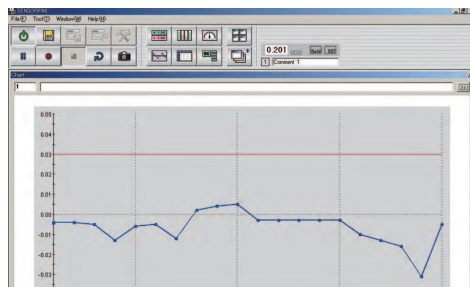


Chart screen

Specifications	SENSORPAK
No.	02NGB030
Display	-
Calculation function	Calculation items : Sum, difference, total, average, maximum, minimum, range (maximum-minimum), calculation with a constant. Connectable gauges : Max. 30 calculation items (between desired gauges)
Total tolerance judgement	GO/NG judgement (by specifying gauges to be used for total tolerance judgement) GO/NG signal output with optional I/O cable
Input function	-
Output function	Direct output to Excel spreadsheet, CSV file output (compatible with MeasurLink)
Connectable items	Various Mitutoyo counters (those compatible with RS LINK)
Applicable counter types	Counters with RS-232C interface, EH and EV