

Laser Scan Micrometer Display Unit

Series 544

LSM-6200 Display Unit

Standard Display Unit for Laser Scan Micrometer

- Setup values can be continuously monitored with this dual-display design. Simultaneous display of two measurement values also possible.
- Either the segment measurement (7 segments max.) or edge measurement (1 to 255 edges) can be selected.
- Includes RS-232C and I/O and analog interface capabilities.
- Includes statistical calculation and abnormal data eliminating functions.




LSM-6200 display unit

Metric

No.
544-071D

Inch/Metric

No.	Remarks
544-072E	UK only
544-072D*	

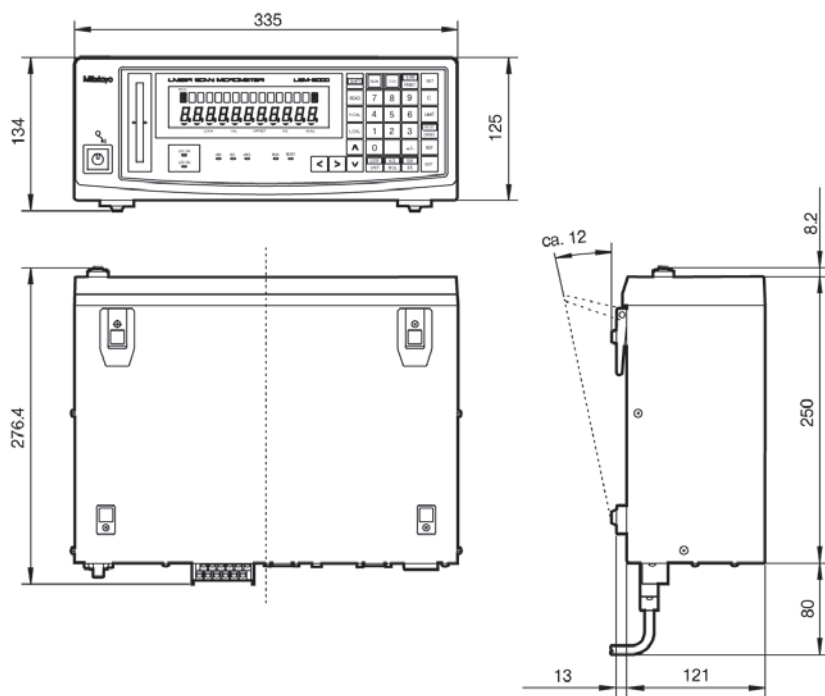

02agp150 - Dual-type add-on unit

Functions	Series 544
GO/±NG judgement	●
Multi-limit judgement	●
Sample Measurement	●
Statistical calculation	●
ZERO/SET	●
PRESET	●
Group judgement	●
Workpiece position display	●
Dual-gauge calibration	●
Transparent object measurement	●
Automatic measurement	●
Dual-unit measurement (optional)	●
Abnormal data elimination	●
Data Output	●
OFFSET	●

Specifications

Main display	16-digit fluorescent tube
Interface units equipped	RS-232C, Analog I/O, Foot Switch
Power supply	100-240V AC, 40 VA, 50/60Hz



Refer to the LSM brochure