


Optional Accessories

- 905338:** SPC data cable (1 m)
£32.90
- 905409:** SPC data cable (2 m)
£36.80
- 06ADV380F:** USB Input Tool Direct USB-ITN-F (2 m)
£90.80
- 02AZD790F:** SPC data cable for U-WAVE-T (160 mm)
£52.20
- 02AZE140F:** SPC data cable for U-WAVE-T and footswitch (160/500 mm)
£107.00




DIMENSIONS

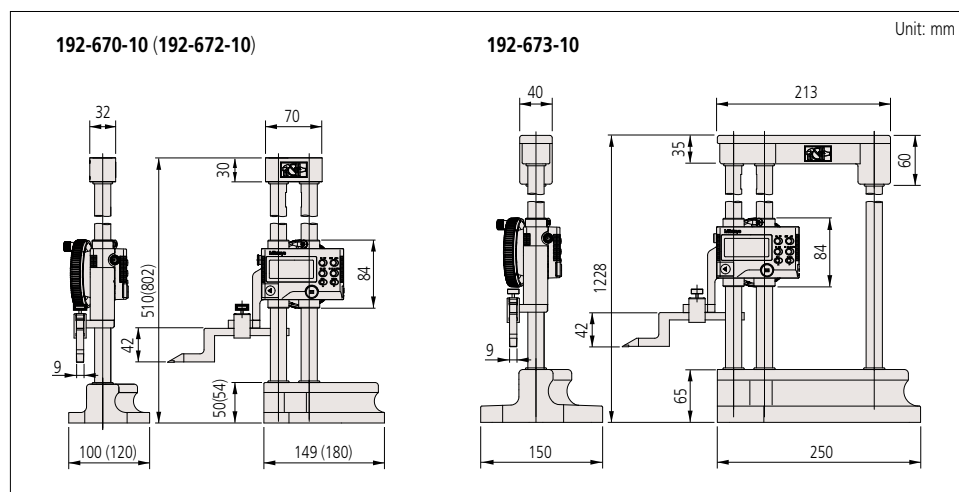

Presetting (2 positions)

With two preset functions, two reference heights created by gauge blocks can be used to make repetitive measurements with high accuracy relative to a datum plane (surface plate).

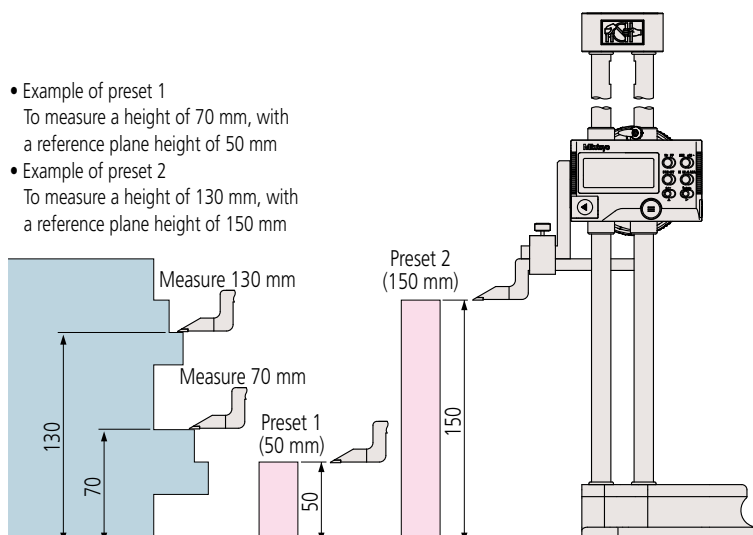

Bidirectional touch-trigger probe (optional accessory)

Improves accuracy in step, internal thickness, and outside width measurement by minimizing reproducibility error.



SPECIFICATIONS

Code No.	Measuring direction	Relay contact type	Probe overtravel	Probe size	Repeatability	Measuring force	Standard accessories	Price
192-008	Bidirectional	Normally open	1.5 mm	ø3 mm	σ: 2 μm	0.4N	Holder arm, clamp	£378.00