


FEATURES: S Series (Series 2, 3, 4)



- No through screw-holes on the frame for high oil- and dust-resistance. The bezel clamp can be attached either to the right or left side.
- Improved Impact- and oil-resistant materials are employed in the outer frame. Easier reading is due to the improved shape of the crystal face.

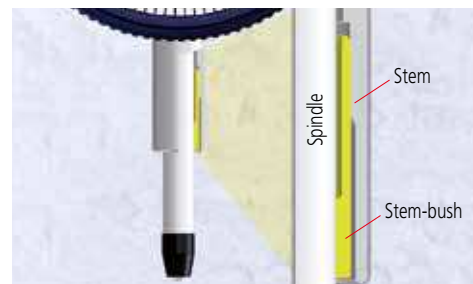


- Revolutionary stem-bush design for trouble-free stem clamping (longer clamping range; maximum tightening torque at the clamping point with M5 screw: 150N-cm).



- The plunger lifting lever (optional: 21AZB149) can be attached to either the right or left side providing high operability and smooth movement. This lever can be easily installed and removed without tools.



- Limit markers (1) can be moved without interfering with the clamp (2).

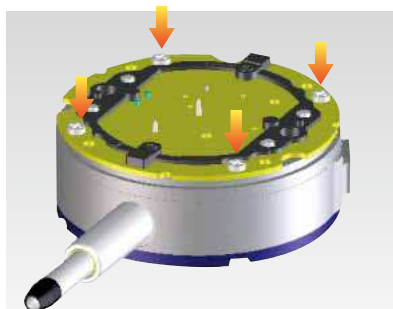

- Greater rigidity in the bearing plate for reduced retrace error (20%) and 4-screw mounting for increased impact resistance.