


Dial Indicators

SERIES 1 – Compact Dial Indicators

- Compact dial indicators with outer bezel diameters of 31, 36 and 40 mm for restricted-space applications in gauging fixtures.

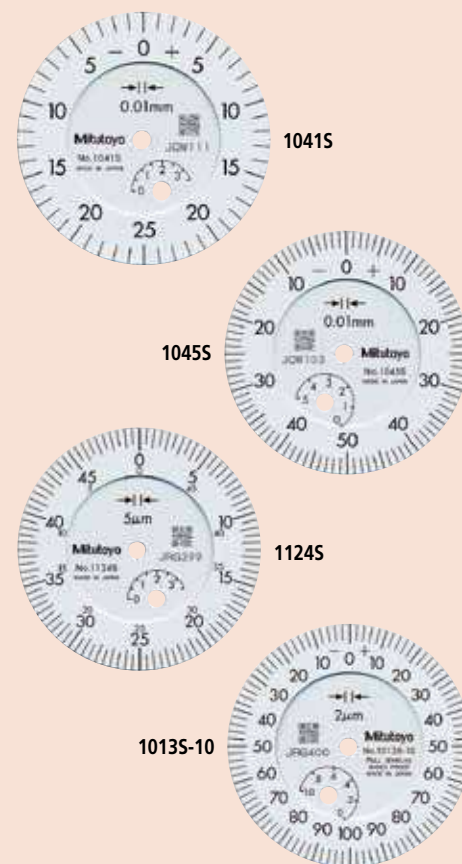

SPECIFICATIONS

Metric											
Code No.	Graduation	Range (range/rev)	Accuracy				Repeat- ability	Scale	Measuring force	Price	
			Overall	Retrace	1/10 rev	1 rev					
1013S-10	0.002 mm	1 mm (0.2 mm)	6 µm	2.5 µm	2.5 µm	5 µm	1 µm	0-100-0	1.5 N or less	£90.00	
1040S	0.01 mm	3.5 mm (0.5 mm)	13 µm	4 µm	8 µm	11 µm	3 µm	±0-50	1.4 N or less	£60.00	
1041S	0.01 mm							0-25-0		£60.00	
1044S	0.01 mm	5 mm (1 mm)						±0-100	0.4 N or less*	£42.00	
1044S-15	0.01 mm									±0-100	£58.00
1044S-60	0.01 mm									±0-100	£70.00
1045S	0.01 mm								0-50-0	£46.00	
1124S	0.005 mm	3.5 mm (0.5 mm)	12 µm	3.5 µm	6 µm	10 µm	±0-50		1.4 N or less	£70.00	

* Use in a vertical position only (contact point downward).

Inch										
Code No.	Graduation	Range (range/rev)	Accuracy				Repeat-ability	Scale	Measuring force	Price
			First 1 rev / 2.5 rev / 10 rev		Retrace					
1923B* ²	.0005"	.05" (.02")	±.0005" / ±.0005" / —		.0016"	±.0001"	±.0001"	0-10-0	1.8 N or less	£77.80
1925-10	.0001"	.025" (.01")	±.0002" / ±.0002" / —		.0001"	±.00003"	±.00003"	0-5-0		£88.90
1410S	.001"	.25" (.1")	±.001" / ±.001" / —		.0002"	±.0002"	±.0002"	0-100	1.4 N or less	£61.50
1411S								0-50-0		£61.50
1410S-10								0-100		£75.00
1780S								0-50		£61.50
1781S	.0005"	.125" (.05")	±.0005" / ±.0005" / —		.00016"	±.0001"	±.0001"	0-25-0		£61.50
1506S								0-50		£63.40
1507S								0-25-0		£63.40
1670S								0-40		£61.50
1671S	.0001"	.1" (.04")	±.0001" / ±.0001" / —		.0001"	±.00003"	±.00003"	0-20-0	1.5 N or less	£61.50
1802S-10								0-10		£86.60
1803S-10								0-5-0		£86.60

*² Flat-back type.