


## Lens Thickness Measurement Application Examples

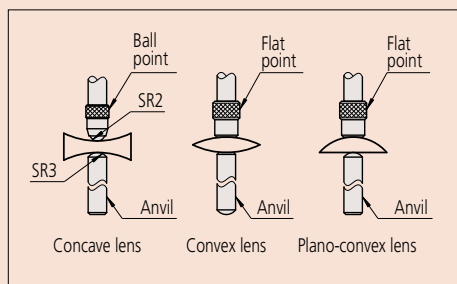

Note: Parallelism between the flat point and anvil is 5 µm

## SPECIFICATIONS

| Metric                                   |           |            |          |                 |         |
|------------------------------------------|-----------|------------|----------|-----------------|---------|
| Code No.                                 | Range     | Graduation | Accuracy | Measuring force | Price   |
| Standard, ceramic plunger/anvil          |           |            |          |                 |         |
| 7301                                     | 0 - 10 mm | 0.01 mm    | ±15 µm   | 1.4 N or less   | £72.30  |
| 7305                                     | 0 - 20 mm |            | ±20 µm   | 2.0 N or less   | £88.30  |
| Deep throat, ceramic plunger/anvil       |           |            |          |                 |         |
| 7321                                     | 0 - 10 mm | 0.01 mm    | ±15 µm   | 1.4 N or less   | £87.00  |
| 7323                                     | 0 - 20 mm |            | ±22 µm   | 2.0 N or less   | £101.00 |
| Lens thickness                           |           |            |          |                 |         |
| 7313                                     | 0 - 10 mm | 0.01 mm    | ±15 µm   | 1.4 N or less   | £79.20  |
| Groove depth                             |           |            |          |                 |         |
| 7315                                     | 0 - 10 mm | 0.01 mm    | ±15 µm   | 1.4 N or less   | £98.00  |
| Tube thickness                           |           |            |          |                 |         |
| 7360                                     | 0 - 10 mm | 0.01 mm    | ±15 µm   | 1.4 N or less   | £70.80  |
| Inch                                     |           |            |          |                 |         |
| Code No.                                 | Range     | Graduation | Accuracy | Measuring force | Price   |
| Fine dial reading, ceramic plunger/anvil |           |            |          |                 |         |
| 7326S                                    | 0 - .05"  | .0001"     | ±.0002"  | 1.4 N or less   | £117.00 |
| Standard, ceramic plunger/anvil          |           |            |          |                 |         |
| 7300S                                    | 0 - .5"   | .001"      | ±.001"   | 1.4 N or less   | £76.00  |
| 7304S                                    | 0 - 1"    |            | ±.002"   | 2.0 N or less   | £88.30  |
| Deep throat, ceramic plunger/anvil       |           |            |          |                 |         |
| 7322S                                    | 0 - 1"    | .001"      | ±.002"   | 2.0 N or less   | £101.00 |
| Groove depth                             |           |            |          |                 |         |
| 7316S                                    | 0 - .5"   | .001"      | ±.001"   | 1.4 N or less   | £98.00  |
| Tube thickness                           |           |            |          |                 |         |
| 7361S                                    | 0 - .5"   | .001"      | ±.001"   | 1.4 N or less   | £98.00  |

## DIMENSIONS

