

Functions

Mode key, SET key, DATA key, ON/OFF/0-Preset, Max. reading, Min. reading, ABS/INC switchable, Display hold, Data output, Direction switching, Tolerance LED (green/red), Tolerance judgement

Optional Accessories

- 937387:** SPC data cable (1 m)
£32.90
- 965013:** SPC data cable (2 m)
£39.10
- 02AZD790E:** SPC data cable for U-WAVE-T (160 mm)
£52.20
- 06ADV380E:** USB Input tool direct cable (2 m)
£90.80

SERIES 209 – Digimatic Coolant Proof Outside Caliper Gauge

- Versatile gauge with a choice of arm configurations suitable for measuring grooves and other hard-to-measure features.

IP67




209-572

IP63



209-534

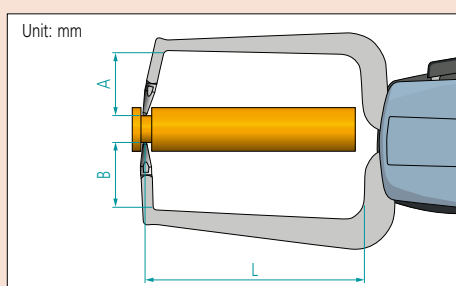

L : Maximum reach of contact arms over workpiece
A : Maximum penetration depth of upper contact
B : Maximum penetration depth of lower contact

SPECIFICATIONS

Inch/Metric									
Code No.	Range	Measuring force	Graduation	Accuracy	A	B	L	Type	Price
Measuring contacts: Carbide ball $\phi 1.5$ mm									
209-572	0 - 20 mm	1.1/1.6 N	0.01 mm	0.03 mm	24.7	24.6	85	Fig. 1	£671.00
Measuring contacts: Carbide ball $\phi 5$ mm									
209-534	0 - 60 mm	0.9/1.2 N	0.02 mm	0.06 mm	25	25	190	Fig. 1	£834.00




Figure 1