

Functions

Mode key, SET key, DATA key, ON/OFF/O-Preset, Max. reading, Min. reading, ABS/INC switchable, Display hold, Data output, Direction switching, Tolerance LED (green/red), Tolerance judgement

Optional Accessories


- 937387:** SPC data cable (1 m)
£32.90
- 965013:** SPC data cable (2 m)
£39.10
- 02AZD790E:** SPC data cable for U-WAVE-T (160 mm)
£52.20
- 06ADV380E:** USB Input tool direct cable (2 m)
£90.80



209-551



209-558

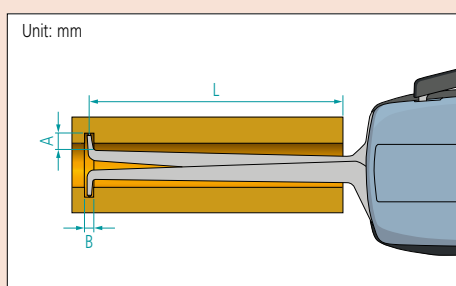

Unit: mm

L : Maximum reach of contact arms over workpiece
A : Maximum groove depth
B : Maximum groove width

SPECIFICATIONS

Inch/Metric									
Code No.	Range	Measuring force	Graduation	Accuracy	A	B	L	Type	Price
Measuring contacts: Carbide ball $\phi 0.6$ mm									
209-551	5 - 15 mm	0.8/1.2 N	0.005 mm	0.015 mm	2.3	0.8	35	Fig. 3	£620.00
Measuring contacts: Carbide ball $\phi 1$ mm									
209-552	10 - 30 mm	1.1/1.6 N	0.01 mm	0.03 mm	5.2	1.2	85	Fig. 3	£545.00
209-904	13 - 43 mm	1.2/1.7 N	0.02 mm	0.04 mm	5.9	5.9	127	Fig. 1	£561.00
209-556	50 - 70 mm	1.1/1.6 N	0.01 mm	0.03 mm	8.3	1.2	85	Fig. 2	£545.00
209-558	70 - 90 mm								£545.00




Figure 1




Figure 2




Figure 3