

Functions

- Customization: Desired parameters can be selected for calculation and display.
- GO/NG judgement: By max value / 16% / Standard deviation
- Storage of setups: Save the setup at power OFF
- Storage
Internal memory: Setups (10 sets),
Measured profile (1 set)
- Memory card
(option): 500 setups, 10000 measured profiles,
500 display images, text file (setups /
measured profile / assessed profile /
bearing area curve / amplitude
distribution curve)
- Calibration: Auto-calibration with the entry of
numerical value / average calibration
with multiple measurement (max. 5
times) is available




DIMENSIONS: Display unit, drive unit

Drive unit stored inside display unit

(Standard detector installed in drive unit) SJ-210 series

Unit: mm

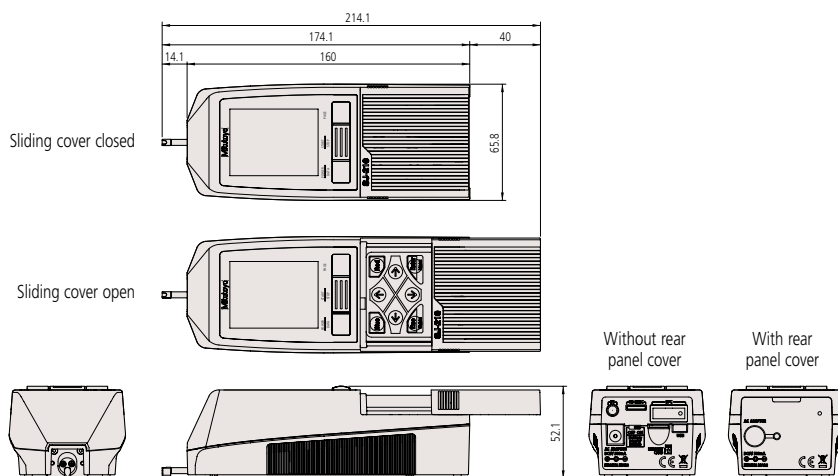

Drive unit not stored inside display unit

(Standard detector installed in drive unit) SJ-210 series

