

Technical Data for 573 series

Dust/water protection

level: IP67^{*2}

Scale type: ABSOLUTE electromagnetic induction linear encoder

Max. response speed: Unlimited

Battery: SR44 (1 pc.), **938882**

Battery life: Approx. 3 years under normal use

^{*2} Rustproofing treatment to be applied after use.

Optional Accessories for 573 series

05CZA624: SPC data cable with pushbutton (1 m)
£58.50

05CZA625: SPC data cable with pushbutton (2 m)
£70.40

06ADV380A: USB Input Tool Direct USB-ITN-A (2 m)
£106.00

02AZD790A: SPC data cable for U-WAVE-T (160 mm)
£52.20

02AZE140A: SPC data cable for U-WAVE-T and footswitch
(160/500 mm)
£114.00




SERIES 573 – ABSOLUTE Digimatic Coolant Proof Point Caliper SERIES 536 – Vernier Point Caliper

- Narrow-tip jaws fit into very small grooves and tracks, making many previously difficult outside measurements far easier to obtain.
- Can measure outside and inside dimensions, depth, and steps.


- Digimatic models feature Mitutoyo's ABSOLUTE system with IP67 ingress protection. No need to reset the origin after switching on.
- Digimatic models enable integration into statistical process control and measurement systems.

ABSOLUTE

IP67

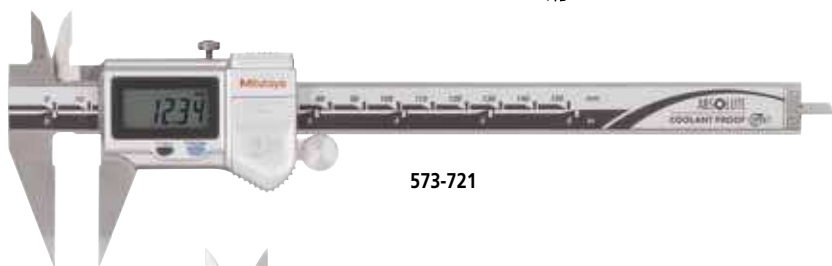

573-721

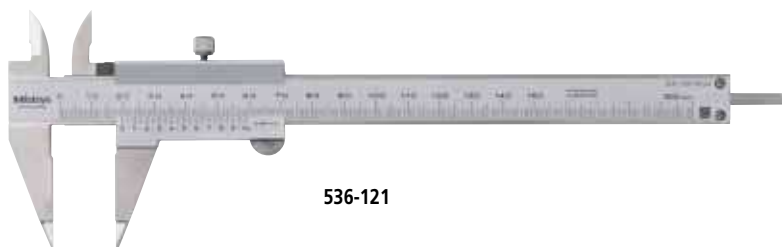

536-121

SPECIFICATIONS

Inch/Metric				
Code No.	Range	Resolution	Accuracy*1	Price
ABSOLUTE Digimatic type				
573-721	0 - 150 mm (0 - 6")	0.01 mm (.0005")	±0.02 mm (±.001")	£240.00
573-725				£290.00
Metric				
Code No.	Range	Graduation	Accuracy	Price
Vernier Type				
536-121	0 - 150 mm	0.05 mm	±0.05 mm	£137.00

^{*1} Excluding quantizing error.

DIMENSIONS

