


Depth Gauges

SERIES 571 – ABSOLUTE Digimatic Coolant Proof Hook End Depth Gauge

- The end of the main beam is hook-shaped to allow depth and thickness measurements of a projected portion or lip in a hole, in addition to standard depth measurement.
- Enables stable depth measurement with a resolution of 0.01 mm.
- Features Mitutoyo's ABSOLUTE system with IP67 ingress protection. No need to reset the origin after switching on.
- Optional longer extension bases are available.
- The OFF switch is used to switch between direct display of hook and depth readings.
- Slider operation is smooth and comfortable.
- Allows integration into statistical process control and measurement systems for models with measurement data output connector.

ABSOLUTE

IP67

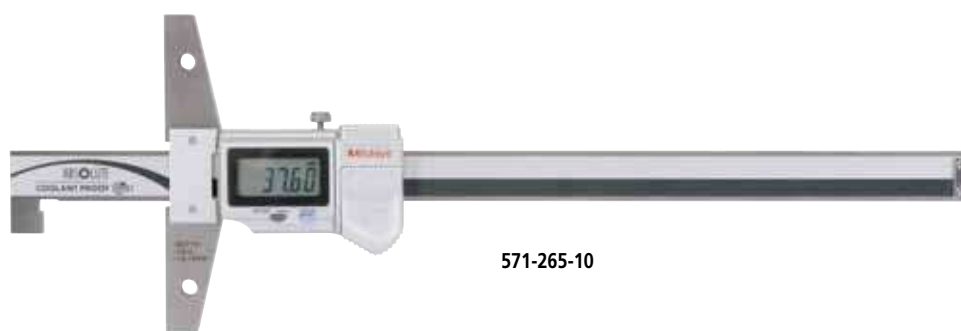

571-265-10


SPECIFICATIONS

Inch/Metric

Code No.	Range: L1 (L2 and L3)	Resolution	Accuracy*	Price
571-264-10	10 - 160 mm (0 - 150 mm) / .4 - 6.4" (0 - 6")	0.01 mm / .0005"	±0.03 mm / ±.0015"	£360.00
571-265-10	10 - 210 mm (0 - 200 mm) / .4 - 8.4" (0 - 8")			£406.00

* Excluding quantizing error.

DIMENSIONS

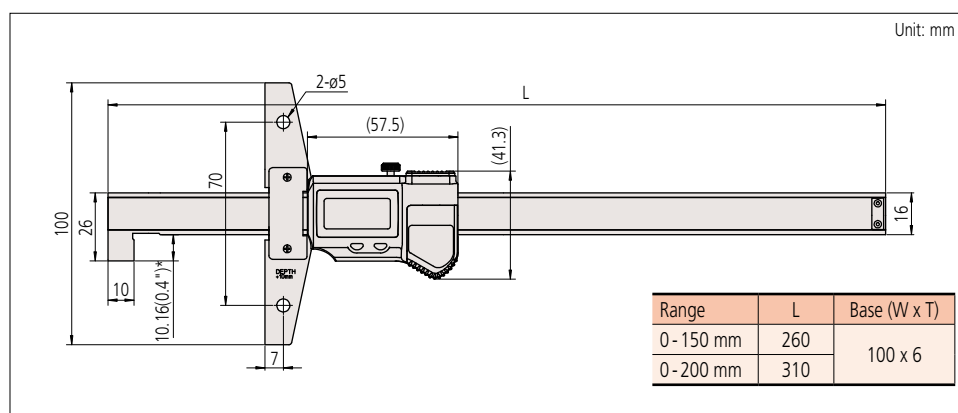

Technical Data

Scale type:	ABSOLUTE electrostatic linear encoder
Battery:	SR44 (1 pc.), 938882
Battery life:	Approx. 3 years under normal use.

Optional Accessories

05CZA624:	SPC data cable with pushbutton (1 m)	£58.50
05CZA625:	SPC data cable with pushbutton (2 m)	£70.40
06ADV380A:	USB Input Tool Direct USB-ITN-A (2 m)	£106.00
02AZD790A:	SPC data cable for U-WAVE-T (160 mm)	£52.20
02AZE140A:	SPC data cable for U-WAVE-T and footswitch (160/500 mm)	£114.00

